



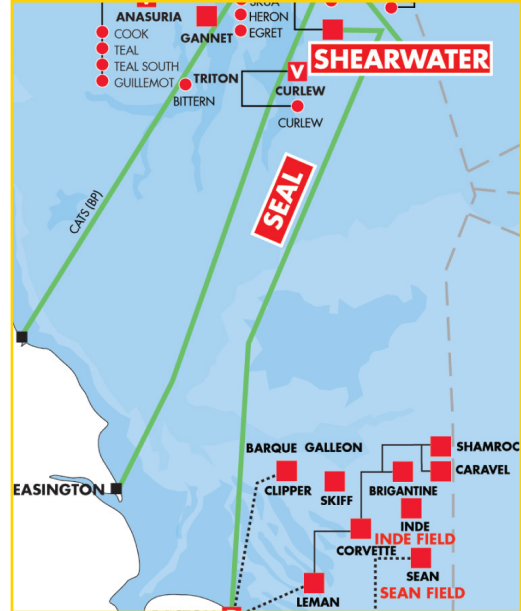

SHEARWATER ELGIN AREA LINE (SEAL)

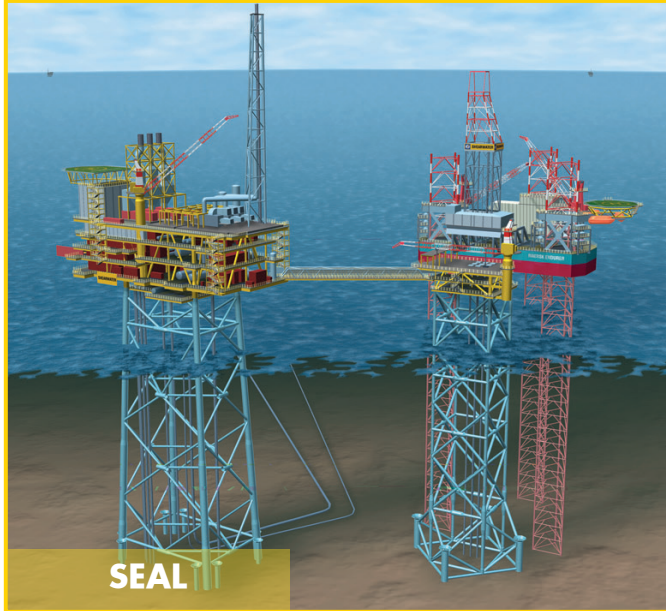

SEAL

SEAL System transports sales quality gas from the Shearwater and Elgin Franklin platforms to the Bacton Gas Terminal on the Norfolk coast and subsequently onto the adjacent Transco and I(UK) transmission facilities

KEY FACTS

Sector	Central North Sea
Commissioned	2000
Diameter	34 inch diameter
Hydrocarbons Produced	Gas
Export Method	Exported to the Bacton Terminal on the Norfolk coast
Operated / Non Operated	Operated

INFRASTRUCTURE INFORMATION

Entry Specification:	GCV: 38.0-42.3 MJ/Sm ³ , WI: 48.3-51.2 MJ/Sm ³ , O ₂ : $\leq 10\text{ ppmV}$, CO ₂ : $\leq 2.0\text{ mol\%}$, H ₂ S: $\leq 3.3\text{ ppmV}$ (incl of COS), ICF: ≤ 0.48, Sl: ≤ 0.6, Total Sulphur: $\leq 15\text{ ppmV}$, Methanol: $\leq 5\text{ mg/Nm}^3$, H ₂ O Dew Point: $\leq -10\text{C}$ up to 75 Barg, HC Dew point: $\leq -2\text{C}$ up to 75 Barg, Inerts: $\leq 7.0\text{ mol\%}$ (5.0 mol% N ₂ max), Pressure: $\leq 145\text{ Barg}$, Temperature: $\leq 80\text{C}$
Exit Specification NTS:	GCV: 36.9-42.3 MJ/Sm ³ , WI: 48.1-51.4 MJ/Sm ³ , O ₂ : $\leq 10\text{ ppmV}$, CO ₂ : $\leq 2.0\text{ mol\%}$, H ₂ S: 3.3 ppmV, Total Sulphur: $\leq 15\text{ ppmV}$, ICF: 0.48, Sl: ≤ 0.6, H ₂ O Dew point $\leq -10\text{C}$ up to 75 Barg, HC Dew Point: $\leq -2\text{C}$ up to 75 Barg, Inerts: $\leq 7.0\text{ mol\%}$ (5.0 mol% N ₂ max), Pressure: 55-75 Barg inclusive*, Temperature: 1-38C inclusive *Delivery Pressure dependent on NTS back pressure.
Exit Specification SILK	GCV: 36.9-42.3 MJ/Sm ³ , WI: 48.1-51.4 MJ/Sm ³ , O ₂ : $\leq 10\text{ ppmV}$, CO ₂ : $\leq 2.0\text{ mol\%}$, H ₂ S: 3.3 ppmV, Total Sulphur: $\leq 15\text{ ppmV}$, ICF: 0.48, Sl: ≤ 0.6, H ₂ O Dew point $\leq -10\text{C}$ up to 75 Barg, HC Dew Point: $\leq -2\text{C}$ up to 75 Barg, Inerts: $\leq 7.0\text{ mol\%}$ (5.0 mol% N ₂ max), Pressure: 55-75 Barg inclusive*, Temperature: 1-38C inclusive. *Delivery Pressure dependent on NTS back pressure.

HIGH LEVEL CAPACITY INFORMATION

The basic capacity information is portrayed by colour coded 'traffic lights' that reflect thresholds of availability over the next 5 years

Available Capacities



Capacity	Ullage as % of system capacity				Comment
	2018	2019	2020	2021	
	Green	Green	Green	Green	

SEAL Capacity 35mscm/d (including Units)

Commercial Terms - SEAL System Owners will engage with potential customers and offer commercial terms in accordance with the Code of Practice on Access to Upstream Oil and Gas Infrastructure on the UK Continental Shelf.

Data Requirements

1. Production Profile(s), development programme.
2. Compositional and chemical injection data
3. Field Owners
4. Relevant supplementary information

CONTACT INFORMATION

Shell For further enquiries regarding the above please contact Charles Cole
 +44 1224 88 2606 Charles.Cole@shell.com

Last update: January 2018

Disclaimer: All the above information is provided by Shell U.K. Limited (for itself, and other Shell group companies including Enterprise Oil U.K. Limited);

- In good faith and without any liability

- Without warranty, implied or express to its accuracy or relevance of use to any other party

- That in any agreement or arrangement with Shell U.K. Limited its use shall be "Subject to Contract"

Shell U.K. Limited reserves the right to update and change the data at any time